


Universal tapping clamp with flange outlet and twin strap, PN 16

3511

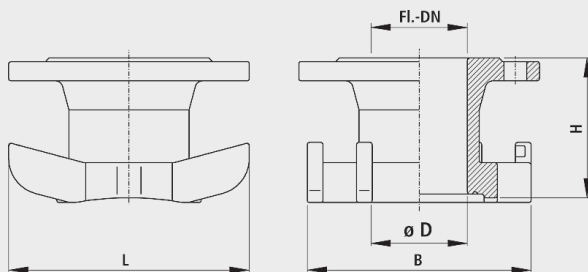

Application

- For cast, FZM, steel and Eternit pipes, DN 150 – DN 500.

Characteristics

- Betriebstemperatur - max. 40°C
- Pressure PN 16

Material

- Gehäuse
 - Späroguss EN-GJS-400 (GGG 40)
 - EWS-Beschichtung nach GSK, RAL-GZ 662, Schichtdicke min. 250 µm

Caution

- Specify pipe NP with order.

		DN (mm)	Flange- DN (mm)	ø D	PN (bar)	L (mm)	B (mm)	H (mm)	Drill-ø max. (mm)	weight (kg)	NPK No. 412
3511080150	1	150-500	80	80	16	200	185	120	77	7.700	261113
3511100200	2	200-500	100	100	16	200	185	120	95	8.300	261114

1 = Dichtung 3170 verwenden

2 = Dichtung 3180 verwenden