


Spigot-end slider, PN 5

4115

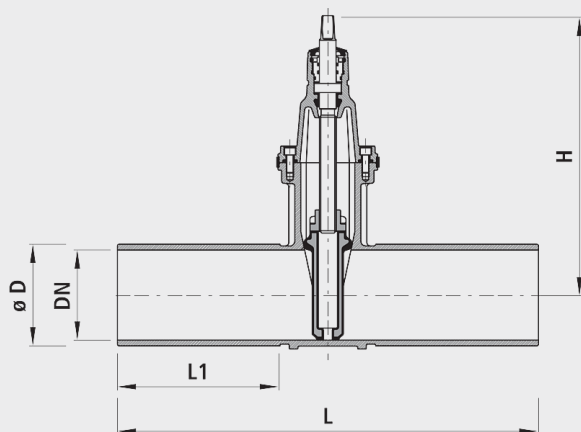

Application

- The spigot-end slider can be combined with all shaped parts.
- In connection with dual-chamber flange very versatile.
- Also suitable for use with multi-functional couplings.
- Can be shortened or delivered already cut from the factory.
- The employment of natural gas has to be specified, so that the required tests (PG1 for Underground Fittings and PG3 Fittings in Installations) with the associated test certificate 3.1B can be made according to DIN EN 10204.

Material

- Gehäuse
 - Sphäroguss EN-GJS-400 (GGG 40)
 - EWS-Beschichtung nach GSK, RAL-GZ 662, Schichtdicke min. 250 µm
 - Lackierung: Gelb RAL 1021
- Steckmuffen
 - nach DIN 28603
- Dichtungen
 - NBR

Caution

- Surcharge test PG3 pro shut-off-organ article no 9999500000

	DN	ø D (mm)	PN (bar)	H (mm)	L (mm)	L1 (mm)	weight (kg)
4115080000	80	98	5	335	600	245	19.500
4115100000	100	118	5	375	600	240	25.200
4115125000	125	144	5	450	600	220	37.000
4115150000	150	170	5	460	600	220	40.600
4115200000	200	222	5	565	600	215	65.000