


Combi-4 with flanges, PN 16

4400

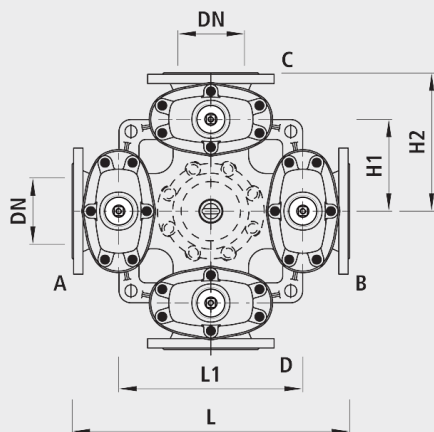

Outlet without slider

- Outlets with a blind cover (A, B, C), on request

Vertical outlet

- Vertical outlet DN 100, on request (No. 4410)

Characteristics

- Gehäuse
 - nach DIN EN 1092-2
 - DN 25 bis DN 150: PN 16
 - DN 200 bis DN 600: PN 10 oder 16; bei Bestellung angeben
 - DN 65: 4-Loch-Flansch
- Betriebstemperatur – max. 40°C

Material

- Housing
 - Spheroidal graphite cast iron EN-GJS-400 (GGG 40)
 - EWS coating according to GSK, RAL-GZ 662, coating thickness min. 250 µm

	DN	PN (bar)	L (mm)	L1 (mm)	H (mm)	H1 (mm)	H2 (mm)	weight (kg)	NPK No. 411	NPK No. 412
4400080000	80	16	435	255	313	128	218	75.000	827511	823511
4400100000	100	16	555	365	343	183	278	96.000	827512	823512
4400125000	125	16	615	415	446	308	313	123.000	827513	823513
4400150000	150	16	625	415	433	208	313	158.000	827514	823514
4400200000	200	10	695	465	541	233	348	248.000	827515	823525
4400201000	200	16	695	465	541	233	348	248.000		823535

Height H: Pipe axis up to the spindle end