


Wall duct PE, with male thread, straight, PN 16

6850

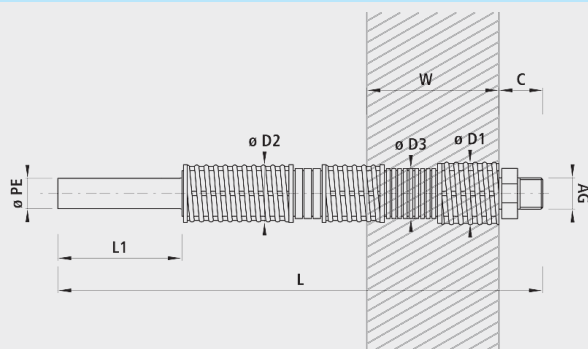

Characteristics

- PE/brass connection with positive and force fitting into the wall protection pipe
- Compatible with multi-range inlets
- SVGW certified

Material

- Weld-in end: PE 100, SDR 11
- Male thread: Brass
- Protective casing: PE with fixed-point fixation

Installation and assembly

- For direct installation in the wall, with or without grouting device
- Dry installation in core drill hole

	ø PE	AG	L (mm)	L1 (mm)	ø D1 (mm)	ø D2 (mm)	ø D3	C cm	ø KB T (mm)	ø KB N (mm)	W T	W N (mm)	weigh t (kg)	NPK No. 411	NPK No. 412
6850032070	32	1"	780	300	66	60	53	6-10	100	90	380	280	1.100	88415 2	71121 1
6850040070	40	1¼"	780	300	66	60	53	6-10	100	90	380	280	1.300	88415 3	71122 2
6850051070	50	1¼"	780	300	80	75	75	8-12	130	120	380	280	2.200	88415 4	71122 3
6850050070	50	1½"	780	300	80	75	75	8-12	130	120	380	280	2.200	88415 4	71123 3
6850063070	63	2"	780	300	95	90	90	8-12	130	120	380	280	2.700	88415 5	71124 4
6850032110	32	1"	1100	300	66	60	53	6-10	100	90	680	580	1.500		
6850040110	40	1¼"	1100	300	66	60	53	6-10	100	90	680	580	1.700		
6850050110	50	1½"	1100	300	80	75	75	8-12	130	120	680	580	2.900		
6850063110	63	2"	1100	300	95	90	90	8-12	130	120	680	580	3.700		