


Compression sealing ring inside/outside for dry installation

6872

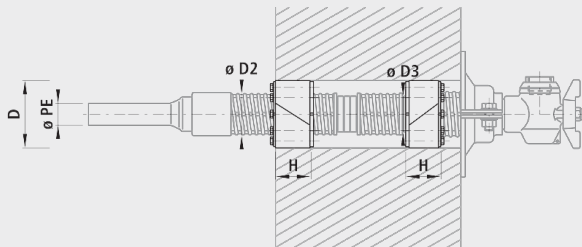

Application

- Can be mounted directly in the drill hole or protection pipe

Characteristics

- Two part sealing ring
- Pressure water tightness up to 1 bar

Material

- INOX
- NBR-Rubber

Installation and assembly

- Position the sealing ring on the wall entry and mount them together.
- Possible to use $\varnothing$ 8 mm copper wire for the earthing

Anmerkung

- Scope of delivery: 2 sealing rings
- Sealing rings can be sold individually

	$\varnothing$ PE	D (mm)	$\varnothing$ D2 (mm)	$\varnothing$ D3	H (mm)	$\varnothing$ KB T (mm)	weight (kg)	NPK No. 412
6872V25032	32/40	100	60	53	50/40	100	1.500	714212
6872V40000	50	130	75	75	50	130	3.200	714213
6872V50010	63	130	90	90	50	130	2.500	714214