


Double-sided connector HAWLE-MULTIGRIP thrust protection, PN 16

7227

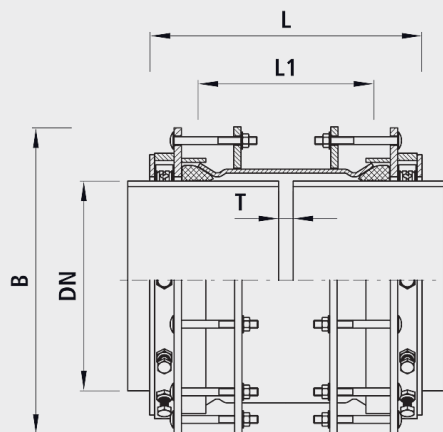

Application

- Tensile longer range coupling for all types of pipes
- Can be looped

Characteristics

- The sealing collars are tightened individually on each pipe side, independently of the thrust protection.
- The conical sealing collar allows a pipe tolerance of 30 mm.
- The thrust protection must be tightened individually for each side.
- The entire coupling can be individually adapted with the individual fixing to the pipe.
- Flanschen-Anschlussmasse
- nach EN 1092-2
- Flange connection compound
- according to EN 1092-2
- Druckstufe PN 16
- Andere Druckstufen auf Anfrage möglich
- Der Korrosionsschutz dieser Mehrbereichskupplung ist mit der bewährten Rilsan®-Beschichtungstechnik.

Material

- Gehäuse und Spannring
- Stahl mit Rilsan® Beschichtung
- Dichtung
- Standard EPDM nach W 270, NBR auf Anfrage
- Zugsicherungselemente
- Gehärteter Stahl mit Dacromet®-Beschichtung (Dauergeschmierte Schrauben)
- Schrauben
- Stahl mit Dacromet®-Beschichtung (Dauergeschmiert)

Caution

- For the fiber cement pipes tensile strength is not guaranteed.
- A supporting sleeve must be used without fail for high tensile connections of PE pipes.
- Other nominal widths on request

	DN	ø D min./max.	PN (bar)	L (mm)	L1	T min.	B (mm)	weight (kg)
7227350355	350	340-370	16	510	355	25	560	156.000
7227350375	350	360-390	16	510	355	25	580	163.000
7227400400	400	385-415	16	510	355	25	600	172.000
7227400430	400	415-445	16	510	355	25	640	182.000
7227450455	450	440-470	16	510	355	25	660	199.000
7227450480	450	465-495	16	510	355	25	680	207.000
7227500505	500	490-520	16	510	355	25	720	216.000
7227500530	500	515-545	16	510	355	25	740	225.000
7227500560	500	545-575	16	510	355	25	788	228.000
7227600610	600	595-625	16	510	355	25	808	244.000
7227600630	600	615-645	16	510	355	25	828	250.000
7227700710	700	695-725	16	510	355	25	908	295.000
7227700735	700	720-750	16	510	355	25	933	307.000
7227800800	800	785-815	16	510	355	25	998	329.000
7227800810	800	795-825	16	510	355	25	1008	332.000
7227800840	800	825-855	16	510	355	25	1038	355.000
7227900900	900	885-915	16	510	355	25	1098	376.000
7227900915	900	900-930	16	510	355	25	1113	381.000
7227900945	900	930-960	16	510	355	25	1143	425.000
7227100001	1000	985-1015	16	510	355	25	1198	446.000
7227100002	1000	1000-1030	16	510	355	25	1213	451.000
7227100003	1000	1030-1060	16	510	355	25	1243	465.000
7227100004	1100	1100-1130	10	510	355	25	1313	471.000
7227100005	1100	1135-1165	10	510	355	25	1348	499.000
7227100006	1100	1185-1215	10	510	355	25	1398	517.000
7227100007	1200	1205-1235	10	510	355	25	1418	525.000
7227100008	1200	1240-1270	10	510	355	25	1453	542.000