


Wall duct with corner ball valve PE/VS and Firesafe handle, PN 5

6862

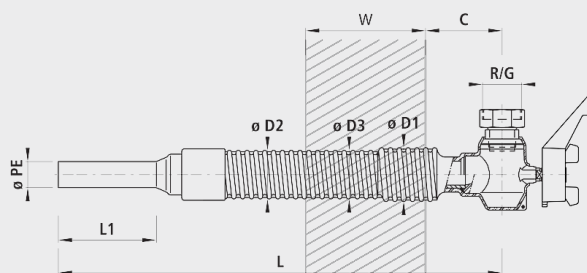

Characteristics

- Corner ball valve can be thermally loaded up to 650°C
- Firesafe handles fitted
- Screwthread with connection (IG/G) unlockable
- Compatible with multi-range inlets
- SGVW certified

Material

- Fully encapsulated steel/PE connection
- Weld-in end: PE 100, SDR 11
- Protective casing: PE with fixed-point fixation

Installation and assembly

- For direct installation in the wall, with or without grouting device
- Dry installation in core drill hole
- Compatible with multi-range inlets
- The pull-out protection can be mounted directly.

Caution

- Observe the installation instructions
- On request available without Firesafe handle (n° 68621)

	ø PE	R	G	L (mm)	L1 (mm)	ø D1 (mm)	ø D2 (mm)	ø D3	C cm	ø KB T (mm)	ø KB N (mm)	W T	W N (mm)	weight (kg)
6862032070	32	1"	1½"	700	120	66	60	53	10-14	100	90	370	300	3.700
6862040070	40	1¼"	2"	740	120	80	75	75	11-15	130	120	370	300	6.500
6862050070	50	1½"	2¼"	740	130	80	75	75	11-15	130	120	370	300	6.500
6862063070	63	2"	2¾"	740	130	95	90	90	12-16	130	120	370	300	9.800
6862032110	32	1"	1½"	1000	120	66	60	53	10-14	100	90	670	600	4.800
6862040110	40	1¼"	2"	1040	120	80	75	75	11-15	130	120	670	600	8.200
6862050110	50	1½"	2¼"	1040	130	80	75	75	11-15	130	120	670	600	8.200
6862063110	63	2"	2¾"	1040	130	95	90	90	12-16	130	120	670	600	11.700