


## Curva flangiata 90°, PN 16

8530

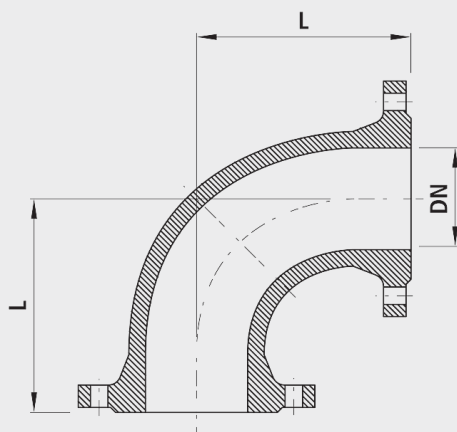

## Materiale

- Corpo
  - Ghisa sferoidale EN-GJS-400 (GGG 40),
  - Rivestimento EWS secondo GSK, RAL-GZ 662, spessore dello strato min. 250 µm

## Attenzione

- Lunghezze speciali fino a 2000 mm e le forme speciali secondo lo schizzo in St 37, con rivestimento in EWS, forme speciali

|            | DN  | PN<br>(bar) | L<br>(mm) | Peso<br>(kg) | N° CPN<br>411 | N° CPN<br>412 | BIM /<br>CAD |
|------------|-----|-------------|-----------|--------------|---------------|---------------|--------------|
| 8530050000 | 50  | 16          | 150       | 7.500        | 246216        |               |              |
| 8530065000 | 65  | 16          | 165       | 9.400        | 246217        |               |              |
| 8530080000 | 80  | 16          | 165       | 10.000       | 246218        | 242411        |              |
| 8530100000 | 100 | 16          | 180       | 12.500       | 246219        | 242412        |              |
| 8530125000 | 125 | 16          | 200       | 15.600       | 246221        | 242413        |              |
| 8530150000 | 150 | 16          | 220       | 23.000       | 246222        | 242414        |              |
| 8530200000 | 200 | 10          | 260       | 31.000       | 242223        | 242515        |              |
| 8530201000 | 200 | 16          | 260       | 31.000       | 246223        | 242615        |              |
| 8530250000 | 250 | 10          | 350       | 50.000       | 242224        | 242516        |              |
| 8530251000 | 250 | 16          | 350       | 50.000       | 246224        | 242616        |              |
| 8530300000 | 300 | 10          | 400       | 70.000       | 242225        | 242517        |              |
| 8530301000 | 300 | 16          | 400       | 70.000       | 246225        | 242617        |              |