


Slide clamp ROBUSTO DN 50 Screw sockets, lateral, PN 16

2720

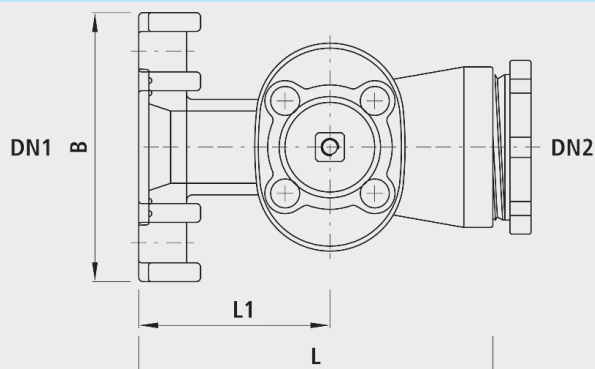

Application

- Assembly with two retaining brackets
- For cast, FZM, steel and Eternit pipes, DN 100 till DN 500

Characteristics

- E3 Slider technology
- Slider size DN 50
- Outlet: Screw socket DN 50
- Betriebstemperatur
- max. 40°C
- Pressure PN 16

Material

- Gehäuse
- Späroguss EN-GJS-400 (GGG 40)
- EWS-Beschichtung nach GSK, RAL-GZ 662, Schichtdicke min. 250 µm

		DN1 (mm)	DN2 (mm)	PN (bar)	L (mm)	L1 (mm)	B (mm)	Drill-ø max. (mm)	weight (kg)	NPK No. 411
2720050000	1	100-500	50	16	245	130	185	46	14.000	861132

1 = Dichtung 3170 verwenden