


seal TYTON-SIT, thrust protected, PN 16

5399

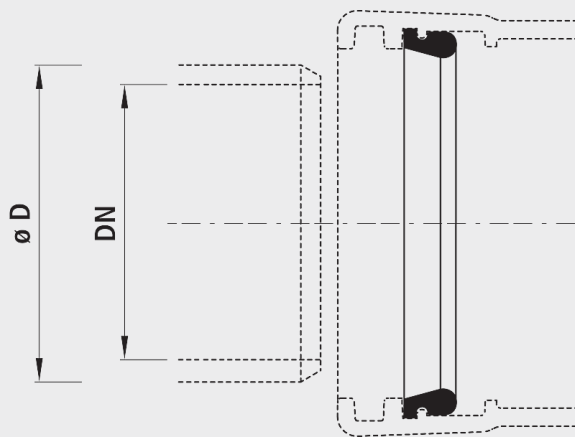

Application

- The TYTON-SIT seal is a plug-in sleeve seal for cast pipes according to DIN 28603. The vulcanised steel claws protects the cast pipe against shearing within the sleeve.
- The mounted marking ring indicates that a TYTON-SIT seal is installed in the sleeve.

Material

- EPDM
- KTW, DVGW and SVGW approval

	DN	$\varnothing D$	PN (bar)	weight (kg)	NPK No. 411	NPK No. 412
5399080000	80	98	16	0.250	238618	238231
5399100000	100	118	16	0.300	238619	238232
5399125000	125	144	16	0.400	238621	238233
5399150000	150	170	16	0.600	238622	238234
5399200000	200	222	16	1.000	238623	238235
5399250000	250	274	16	1.000	238624	238236
5399300000	300	326	16	1.000	238625	238237