
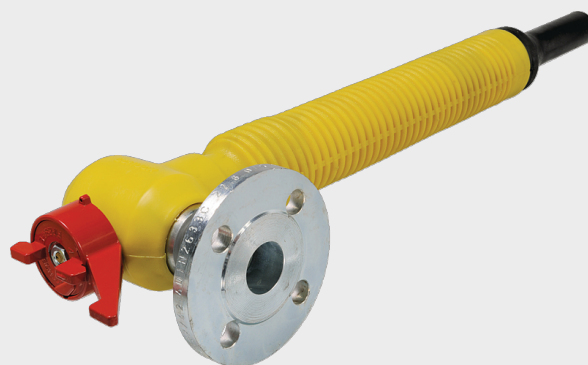


Wall duct with corner ball valve PE/flange and Firesafe handle, PN 5

6861

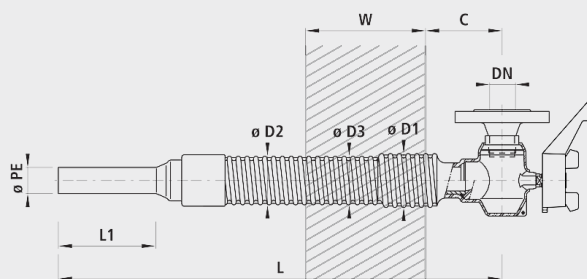

Characteristics

- Corner ball valve can be thermally loaded up to 650°C
- Firesafe handles fitted
- Flange connection according to EN 1092-2 (DIN 28605)
- Compatible with multi-range inlets
- SGVW certified

Material

- Weld-in end: PE 100, SDR 11
- Fully encapsulated steel/PE connection
- Protective casing: PE with fixed-point fixation

Installation and assembly

- For direct installation in the wall, with or without grouting device
- Dry installation in core drill hole
- The pull-out protection can be mounted directly.

Caution

- Observe the installation instructions
- On request available without Firesafe handle (No. 68611)

	Ø PE	DN	L (mm)	L1 (mm)	Ø D1 (mm)	Ø D2 (mm)	Ø D3	C cm	Ø KB T (mm)	Ø KB N (mm)	W T	W N (mm)	weight (kg)
6861032070	32	25	700	120	66	60	53	10-14	100	90	370	300	4.500
6861040070	40	32	740	120	80	75	75	11-15	130	120	370	300	7.800
6861050070	50	40	740	130	80	75	75	11-15	130	120	370	300	7.800
6861063070	63	50	740	130	95	90	90	12-16	130	120	370	300	11.000
6861032110	32	25	1000	120	66	60	53	10-14	100	90	670	600	5.600
6861040110	40	32	1040	120	80	75	75	11-15	130	120	670	600	9.500
6861050110	50	40	1040	130	80	75	75	11-15	130	120	670	600	9.500
6861063110	63	50	1040	130	95	90	90	12-16	130	120	670	600	13.400