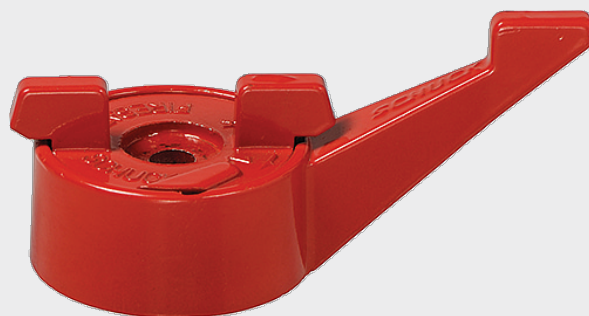


Firesafe handle**6881****Characteristics**

- The ball valve closes automatically in case of fire
- The handle can be installed on all ball valves up to DN 50
- Can also be installed later
- Self-triggering operation from approx. 90°C.
- Very small and compact construction
- SGVW certified

Caution

- Do not trigger by hand, the handle is subject to spring tension

	IG	L (mm)	weight (kg)
6881000000	1"-2"	97	0.250