


Handwheel

7800

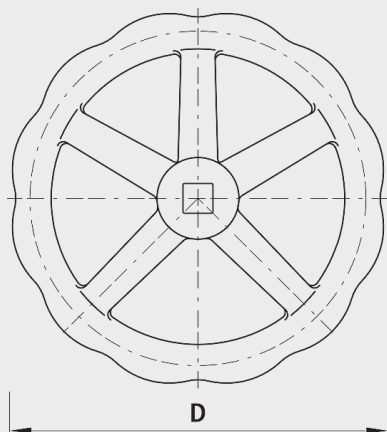

Application

- For all shutoff fittings, House connection 3/4" up to 2", DN 20 up to DN 40, Main slider DN 50 up to DN 600

Material

- Steel or Cast with EWS epoxy coating
- From DN 250: sheet
- Handrad
 - Guss (bis DN 200) oder Stahl (ab DN 250) mit EWS-Beschichtung nach GSK, RAL-GZ 662, Schichtdicke min. 250 µm

	DN	D (mm)	weight (kg)	NPK No. 411	NPK No. 412	BIM / CAD
7800040000	3/4"-2"	140	0.600	873114	871517	
7800050000	50	160	1.100	873116	817518	
7800080000	80-65	190	0.900	873118	871521	
7800100000	100	240	1.000	873119	871522	
7800125150	125-150	320	2.200	87312*	87152	
7800200000	200	360	3.200	873123	872525	
7800250350	250-350	485	4.500	87312*	87152	
7800400500	400	600	21.000	873127	871528	
7800500600	500-600	800	21.200			