


## Flange curved section 45°, PN 16

# 8540

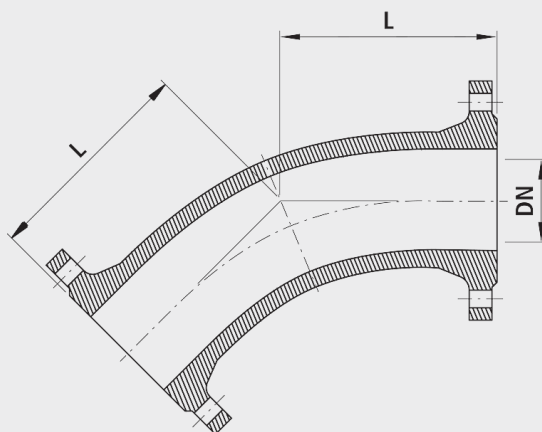

### Material

- Gehäuse:
  - Späroguss EN-GJS-400 (GGG 40)
  - EWS-Beschichtung nach GSK, RAL-GZ 662, Schichtdicke min. 250 µm

### Caution

- Special lengths up to 2000 mm as well as special shapes according to sketches are available on request in powder/coated steel 37

|            | DN  | PN<br>(bar) | L<br>(mm) | weight<br>(kg) | NPK No.<br>411 | NPK No.<br>412 | BIM /<br>CAD |
|------------|-----|-------------|-----------|----------------|----------------|----------------|--------------|
| 8540050000 | 50  | 16          | 150       | 6.000          | 246256         |                |              |
| 8540065000 | 65  | 16          | 165       | 7.500          | 246257         |                |              |
| 8540080000 | 80  | 16          | 130       | 9.500          | 246258         | 242421         |              |
| 8540100000 | 100 | 16          | 140       | 11.500         | 246259         | 242422         |              |
| 8540125000 | 125 | 16          | 150       | 16.400         | 246261         | 242423         |              |
| 8540150000 | 150 | 16          | 160       | 19.300         | 246262         | 242424         |              |
| 8540200000 | 200 | 10          | 180       | 30.800         | 242263         | 242525         |              |
| 8540201000 | 200 | 16          | 180       | 36.000         | 246263         | 242625         |              |
| 8540250000 | 250 | 10          | 350       | 80.000         | 242264         | 242526         |              |
| 8540251000 | 250 | 16          | 350       | 80.000         | 246264         | 246626         |              |
| 8540300000 | 300 | 10          | 400       | 112.000        | 242265         | 242527         |              |
| 8540301000 | 300 | 16          | 400       | 112.000        | 246265         | 242627         |              |