


Installation kit rigid for steel ball valve

9006

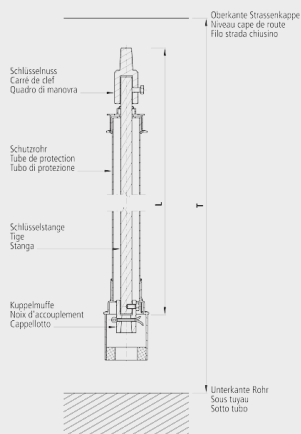

Application

- For all the ball valves with body in steel of d 20 to 225 mm No. 6895 / 6896
- Optical position indicator of the ball valve to the installation kit included
- Special lengths on request

Material

- Einbaugarnituren
 - Schutzrohr aus PE
 - Schlüsselnuss Sphäroguss EN-GJS-400 (GGG 40), verzinkt
 - Kuppelmuffe Sphäroguss EN-GJS-400 (GGG 40), verzinkt
 - Schlüsselstangen Stahl verzinkt

	PE	ST	L (mm)	D (mm)	weight (kg)
9006000000	32-63	33.7-60.3	1120	1480	2.673
9006000001	90-225	88.9-219.1	1120	1650	4.700