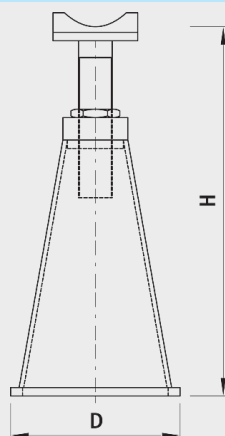


Pipe support, height 600 till 750 mm**9123****Application**

- Higher pipe supports made from INOX are available on request.

Characteristics

- Easy to assemble
- Stable
- Non-corrosive
- The height can be adjusted and it can be used universally
- Special heights on request

Material

- Supports: Aluminium
- Load receptor: INOX with plastic base

	DN	H (mm)	D (mm)	Maximum bearing load	weight (kg)	NPK No. 411
9123000080	80	600-750	300	Fmax = 30 kN 1"/SW 46	7.700	876178
9123000100	100	600-750	300	Fmax = 30 kN 1"/SW 46	7.700	876179
9123000125	125	600-750	300	Fmax = 30 kN 1"/SW 46	7.700	876181
9123000150	150	600-750	300	Fmax = 60 kN 2"/SW 75	7.700	876182
9123000200	200	600-750	300	Fmax = 60 kN 2"/SW 75	7.700	876183
9123000250	250	600-750	300	Fmax = 60 kN 2"/SW 75	7.700	876184
9123000300	300	600-750	300	Fmax = 60 kN 2"/SW 75	7.700	876185
9123000350	350	600-750	300	Fmax = 60 kN 2"/SW 75	7.700	876186
9123000400	400	600-750	300	Fmax = 60 kN 2"/SW 75	7.700	876187
9123000500	500	600-750	300	Fmax = 60 kN 2"/SW 75	7.700	
9123000600	600	600-750	300	Fmax = 60 kN 2"/SW 75	7.700	

SW = Schlüsselweite